

Interactive Flat Panel (S9 PRO Series)



DSY-65S9

- Ultra-narrow bezel design, built-in camera & microphone module integration bezel design, minimalist appearance
- Zero gap Bonding technology, low parallax writing and wider viewing angles
- 3mm anti-glare toughened glass with high haze OC for clearer display against ambient light interference
- 4K Ultra HD display, support full channel 4K UI display
- Front USB3.0*2 + on-board USB3.0*2, supports switching with channels
- Support for Wireless projection
- ±1mm High precision infrared touch control for smooth writing
- Supports dual pens and dual colour displays for easy multi-person collaboration
- Wi-Fi6 support, dual-band 2.4G/5G, AP+STA operating mode
- Built-in 6-array microphone and 13 million autofocus camera
- Intelligent wake-up for HDMI/VGA/RS232 channels & network signal input in standby mode
- One network support, Android and OPS both on Gigabit network
- Support network sharing
- High level welcome application, enriching the live interactive experience with great fun
- Seven industry themed launcher to meet the needs of multiple scenarios

Shenzhen DS Technology Co.,LTD

Web: www.newvideowall.com

Address: Room C707, Huifa Garden, Shangsha, Shatou street, Futian District, Shenzhen, 518000, China

Mob: [+86-19876718908](tel:+86-19876718908) (Wechat/WhatsApp)

Email: sales@newvideowall.com

- Split screen ,parallel tasks and wider scenes
- New hoverball mode for quick customisation of features.
- Eye protection, lock screen, touch lock and other tools.

Product parameters

Panel	LCD Size	65"	
	Type of Panel	ADS	
	Respond Time	8ms	
	Visual Ratio	16:9	
	Max Visual Area	1428.48 (H) ×803.52 (V) mm	
	Resolution	3840 (H) ×2160 (V)	
	Pixel pitch	0.372×0.372mm	
	Frequency	60Hz	
	Display Colors	1.07B (10bit)	
	Color saturability	72%	
	Contrast ration(Typ)	1200:1	
	Viewing Angle	178°(H/V)	
	Light source	DLED	
	Brightness	350cd/m2	
	Life Span	≥30000 小时	
Audio-video parameters	Speaker	Soundtrack	2.0
		Power	2×15W
	Camera	Pixel	1300W
		Qty.	1
		Location	Upper Frame
		Viewing Angle	DFOV: 100° HFOV:91.9° VFOV:60
	Function	Support autofocus, auto white balance, backlight compensation, 3D noise reduction	
	Microphone	Pick-up distance	0~8m
		Qty.	6
		Pick-up angle	0°~180°

Shenzhen DS Technology Co.,LTD

Web: www.newvideowall.com

Address: Room C707,Huifa Garden,Shangsha,Shatou street, Futian District, Shenzhen, 518000,China

Mob: [+86-19876718908](tel:+86-19876718908) (Wechat/WhatsApp)

Email: sales@newvideowall.com

		Function	Supports echo cancellation, background noise suppression, gain compensation
Touch parameter	Touch specifications		Non-contact infrared sensing technology
	Support Systems		Windows10/Windows8/Windows7/Windows XP/Android/Linux/Mac OS X/Chrome
	Touch Points		20 Points Touch
	Min.Identifier		2mm
	Input mode		Opaque object (finger, pen, etc)
	Respond time		≤10ms
	Touch depth		±1mm
	Writing height		≤3mm
	Writing display		Single Stylus pen two-colour
	Output coordinates		32767 (W) ×32767(D)
System	System Version		Android 11.0
	CPU		Quad Core A55
	GPU		Mali G52MP2
	RAM		4GB
	ROM		32GB
Wireless	Bluetooth	Version	5.0
		Working Frequency	2.4GHz
		Working Distance	0~10m
		Remark	Via the wireless module SI07B
	Wi-Fi	Version	802.11ac/b/g/n/a/ax
		Working Frequency	2.4GHz/5GHz
		Working Distance	0~10m
		Remark	Via the wireless module SI07B
I/O Interface	HDMI IN		3 (on board 2, front 1)
	HDMI OUT		1
	USB 2.0		1
	USB 3.0		4 (on board 2, front 2)
	TOUCH		2 (on board 1, front 1)

Shenzhen DS Technology Co.,LTDWeb: www.newvideowall.com

Address: Room C707, Huifa Garden, Shangsha, Shatou street, Futian District, Shenzhen, 518000, China

Mob: [+86-19876718908](tel:+86-19876718908) (Wechat/WhatsApp)Email: sales@newvideowall.com

	VGA IN	1
	AUDIO IN	1
	AUDIO OUT	1
	SPDIF	1
	RS232	1
	TYPE-C	1(front)
	RJ45 OUT	1
	RJ45 IN	1
	Front small board interface	2*USB3.0+TYPE-C+TOUCH OUT+HDMI IN
Power	Voltage	100-240V ~ 50/60Hz 4A
	Max. power consumption	400W
	Standby power consumption	≤0.5W
Structure	Bare dimension	1488×906×87 mm
	Packing dimension	1630×220×1050mm
	VESA hole site	600×400mm
	Wall mounting screw specifications	M8×25mm
	Net weight	TBD
	Gross weight	TBD
Accessories	Power cord	×1
	Stylus pen	×1
	Wall mount	×1
	Operation manual	×1
Environment	Working temperature	0°C~40°C
	Working humidity	10%~90%RH
	Storage temperature	-20°C~60°C
	Storage humidity	10%~90%RH
	Working Elevation	<5000m
Standard module	WIFI module model	SI07B
Optional module	OPS model	OPS42A

Six product view


Shenzhen DS Technology Co.,LTD

Web: www.newvideowall.com

Address: Room C707,Huifa Garden,Shangsha,Shatou street, Futian District, Shenzhen, 518000,China

Mob: [+86-19876718908](tel:+86-19876718908) (Wechat/WhatsApp)

Email: sales@newvideowall.com

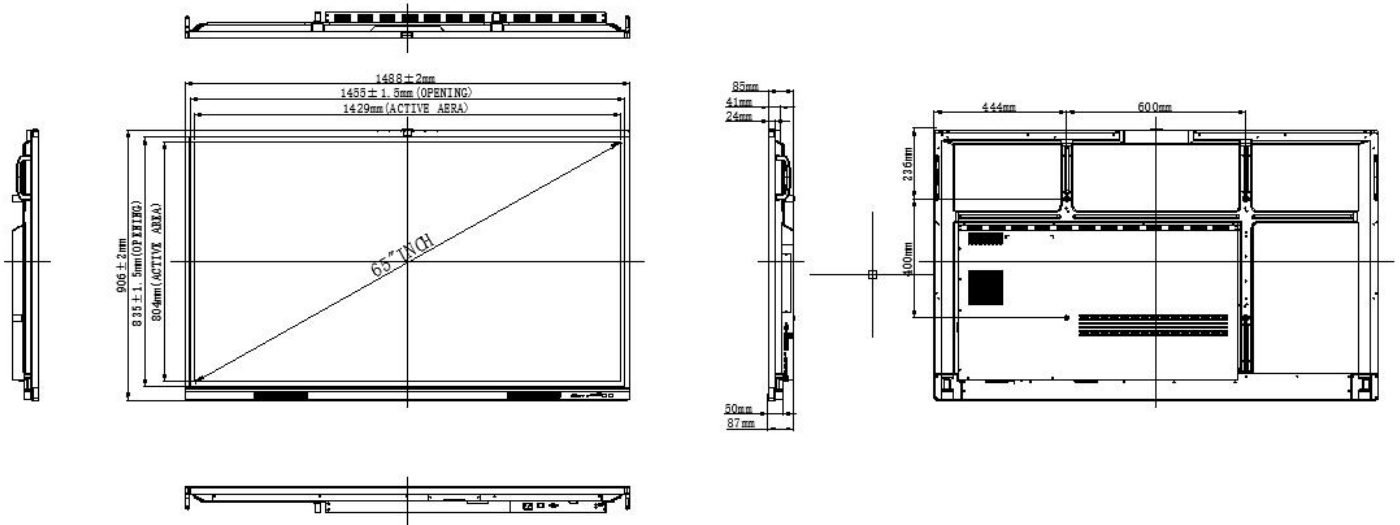

*Disclaimer

Due to product configuration and manufacturing process, actual body size/body weight may vary, please refer to the actual product.

The product images in this specification are for illustrative purposes only. The actual product effect (including but not limited to appearance, colour and size) may vary slightly.

Please refer to the actual product.

In order to provide accurate specifications as far as possible, the text expressions and pictures in this specification may be adjusted and revised in real time.

The product specification may be adjusted and revised in order to match the actual product performance and specifications.

Shenzhen DS Technology Co.,LTD

Web: www.newvideowall.com

Address: Room C707, Huifa Garden, Shangsha, Shatou street, Futian District, Shenzhen, 518000, China

Mob: [+86-19876718908](tel:+86-19876718908) (Wechat/WhatsApp)

Email: sales@newvideowall.com